




Outdoor modular multisport surfacing



PRODUCT HIGHLIGHTS:


- Full suspension system for maximum vertical cushion
- UV stable for outdoor color protection
- Open top design for immediate drainage during wet weather
- Versatile for multiple types of activities
- Superior performance and ball response
- No adhesives or anchoring required
- Hides cracks, puddles and stains
- Custom logos and graphics available
- Durable for year-round use in any climate
- Made in the USA
- 16 Year Warranty

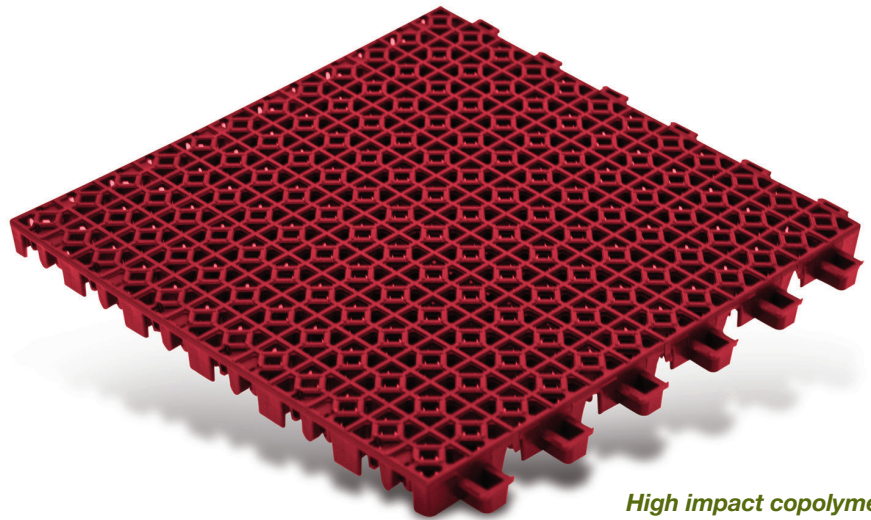

High impact copolymer modular flooring

System Design

- 1 Self-Draining Design
- 2 Suspended Sports Surface
- 3 Concrete/Base Surface

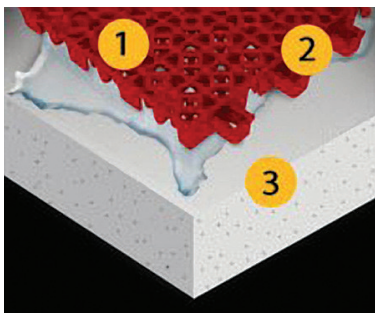

Specifications

- Open Top Design (12" x 12" x 3/4")
- High Impact Copolymer Modular Flooring
- 1128 Individual Support Legs
- Weight: 16 oz. (453.59 g)
- Friction (ASTM C 1028)
 - Dry-0.63
 - Wet-0.61
- Rolling Load (DIN 18032-02): Pass
- Standard Deformation (DIN 18032-02): 1.3 mm
- Force Reduction (EN 14904): <16%
- Ball Rebound (DIN 18032-02): 98%
- Load Bearing Capacity (DIN 18032-02): >200 PSI
- Flatness: 0.0 mm

- Lateral Movement: 0.00" – 0.065"
- Noise Reduction Coefficient (ASTM C 423): 5-10%

For Architectural Specifications please visit our website at www.actionfloors.com

Advanced Features

Most advanced locking system in the industry.






Outdoor modular multisport surfacing



PRODUCT HIGHLIGHTS:


- High level sports performance
- Padded understructure provides unsurpassed ball performance and play
- Built-in shock deflection offers exceptional impact control
- Superior wet & dry weather traction
- Versatile for multi-activity use
- Retrofit old courts in as little as one day
- Seamless design for consistent play and appearance
- UV stable for outdoor color protection
- No adhesives or anchoring required
- Hides cracks, puddles and stains
- Custom logos and graphics available
- Durable for year-round use in any climate
- Made in the USA
- 16 Year Warranty

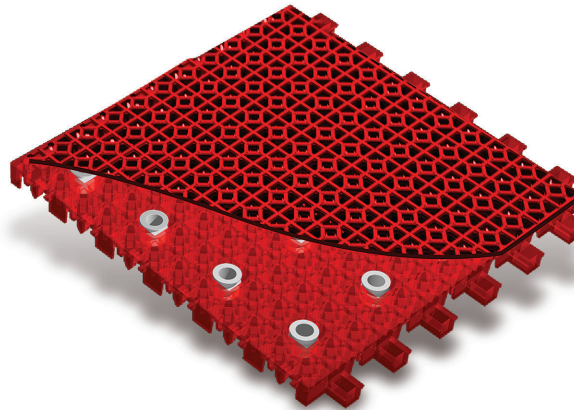

Padded understructure provides unsurpassed ball performance and play

System Design

- 1 Self-Draining Design
- 2 Suspended Sports Surface
- 3 Resilient Padded Layer
- 4 Concrete/Base Surface




Specifications

- Open Top Design (12" x 12" x 3/4")
- High Impact Copolymer Modular Flooring
- 16 Individual Impact Zones
- Compressible shock design (11/16" x 7/8" O.D.)
- Weight: 17.5 oz. (496.12 g)
- Friction (ASTM C 1028)
 - Dry-0.63
 - Wet-0.61
- Rolling Load (DIN 18032-02): Pass
- Standard Deformation (DIN 18032-02): 1.3 mm
- Force Reduction (EN 14904): Class 1 (ASTM F272): Class 2
- Ball Rebound (DIN 18032-02): 98%
- Load Bearing Capacity (DIN 18032-02): >200 PSI
- Flatness: 0.0 mm
- Lateral Movement: 0.00" – 0.065"
- Noise Reduction Coefficient (ASTM C 423): 5-10%

For Architectural Specifications please visit our website at www.actionfloors.com

Advanced Features

- Sixteen individual contact points ensure a consistent playing surface and excellent coefficient of friction to keep the surface in place
- Most advanced locking system in the industry
- FIBA Certified



ACTION FLOOR SYSTEMS LLC
4781 N. U.S. Hwy. 51 • Mercer, WI 54547-9708 U.S.A.

PHONE: 800.746.3512 or 715.476.3512
FAX: 715.476.3585 • E-MAIL: info@actionfloors.com

www.actionfloors.com

© 2014 Action Floor Systems, LLC. 2/14



ISO 14000:2006 VERIFIED

Action QuickCourt™ is manufactured at an ISO 9001:2008 certified facility.