


ActionCush II™ Floor System

SYSTEM TYPE: FLOATING RESILIENT

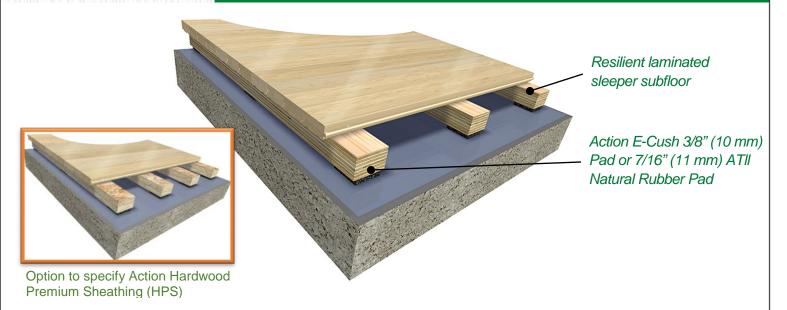

MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL) Action Long Length (FJ) Expansion Ridge Technology (ERT)

Certified by ISSS **TESTING AGENCY:**

PERFORMANCE MEETS OR EXCEEDS:

25/32" (20 mm): 2-5/8" (68 mm) SLAB DEPRESSION: 33/32" (27 mm): 2-7/8" (73 mm)

LEED:











FloorScore®-certified Proprietary certified EPD®

FSC®-certified Maple and Subfloor available MR credits – based on products, selected materials and facility locations

PERFORMANCE & SYSTEM STABILITY:

- Resilient floating laminated sleeper design
- Common system for squash and racquetball venues
- SCORES Compliant
- System features a high system profile height
- Cost effective system featuring laminated sleepers
- Contact Action for system variations to meet other slab or performance needs






















- Delivers uniform surface fulfilling playability expectation.
- Features laminated sleepers that are uniform without twists and bows found in SPF sleepers.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

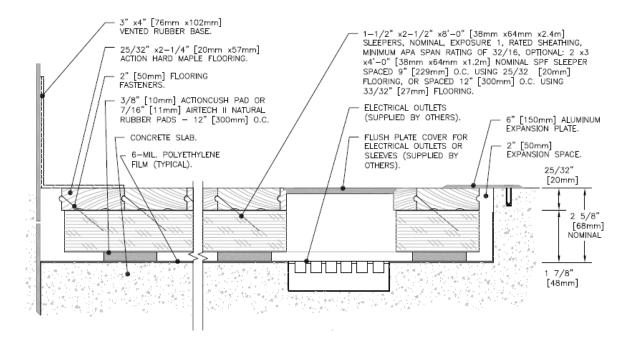

Complete product specifications and system drawings are available online at: www.actionfloors.com

