




## ActionInterloc™ Floor System

**SYSTEM TYPE: FLOATING RESILIENT**

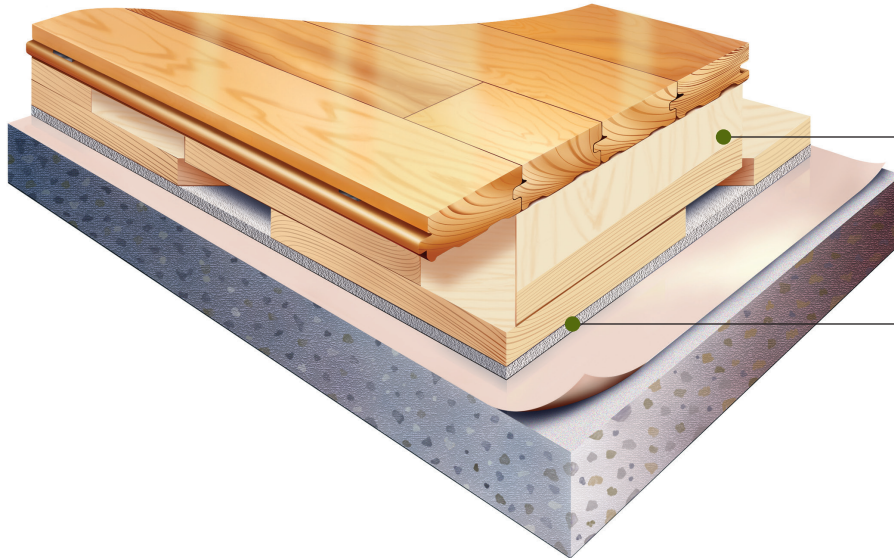

**Two Layers 1" x 6"**  
**(19 mm x 150 mm)**  
**Subfloor Spacing**  
**(6&2 or 2&2)**

**Continuous Blanket Pad**  
**Available: 1/4" (6 mm),**  
**7/16" (11 mm), 1/2" (12 mm),**  
**3/4" (19 mm) Thicknesses**

**MFMA NORTHERN HARD MAPLE  
BY ACTION:**

Random Length (RL)  
Action Long Length (FJ)

**TESTING AGENCY:**

Certified by ISSS

**PERFORMANCE MEETS OR EXCEEDS:**

EN 14904 Type 4  
DIN 18032 Part 2  
ASTM - F2772  
MFMA PUR  
FIBA Level I

**SLAB DEPRESSION:**

25/32" (20 mm): 2-1/2" (64 mm)  
33/32" (26 mm): 2-3/4" (70 mm)

**LEED:**

FSC Maple & Subfloor available, MR credits — based on products, selected materials and facility locations


**PERFORMANCE & SYSTEM STABILITY:**

- Uniform playing surface
- Excellent ball bounce
- SCORES Compliant
- Double layer 1x6 subfloor system maximizes playing surface consistency

- ActionInterLoc has a proven continuous subfloor design that delivers excellent athletic performance with the structural integrity to handle heavy rolling loads.
- ActionInterLoc is available in various configurations, see individual specifications for ActionInterLoc I, InterLoc II, InterLoc LP, and InterLoc Plus for component and assembly data.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040-2006 and ISO 14044: 2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resource Institutes Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.

Complete product specifications and system drawings (CAD and BIM) are available online at:

[www.actionfloors.com](http://www.actionfloors.com)

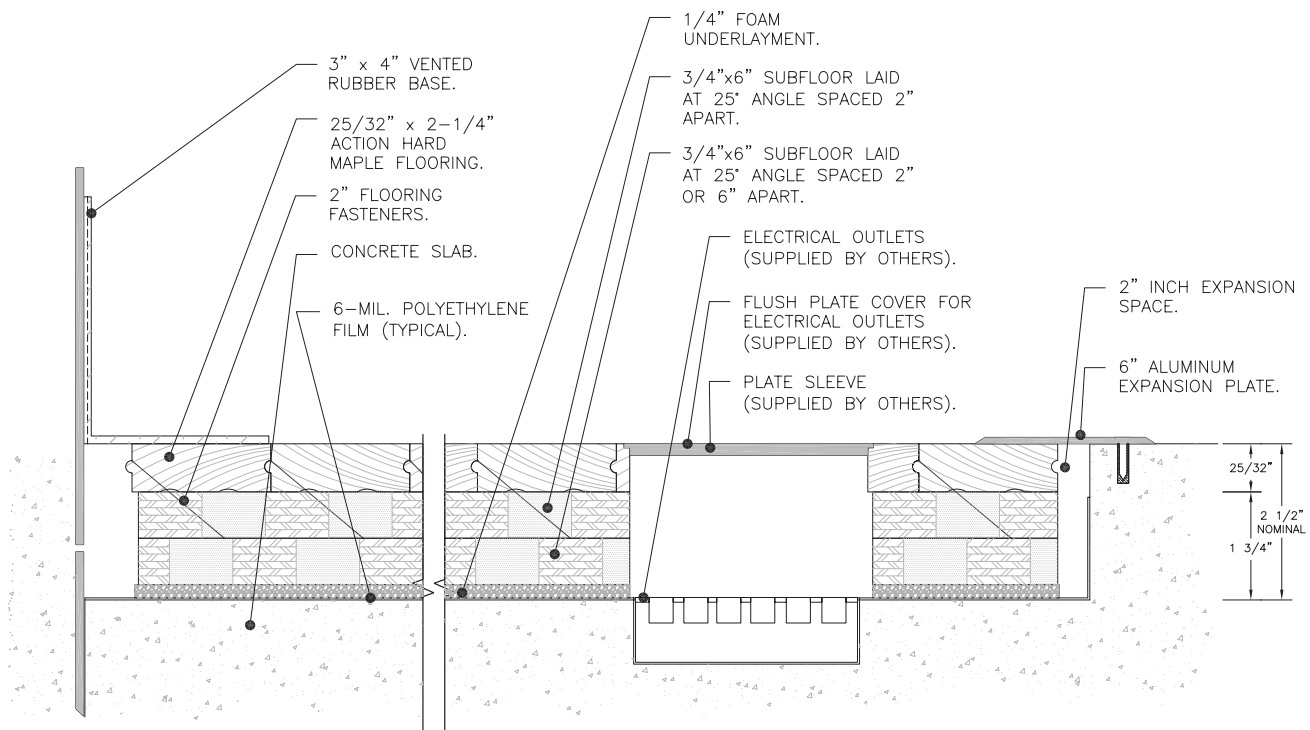

## ActionInterloc I



ACTION FLOOR SYSTEMS LLC  
4781 N. U.S. Hwy. 51 • Mercer, WI 54547-9708 U.S.A.

PHONE: 800.746.3512 or 715.476.3512 • FAX: 715.476.3585

E-MAIL: [info@actionfloors.com](mailto:info@actionfloors.com)

[www.actionfloors.com](http://www.actionfloors.com)

