




ActionInterloc II™ Floor System

SYSTEM TYPE: FLOATING RESILIENT

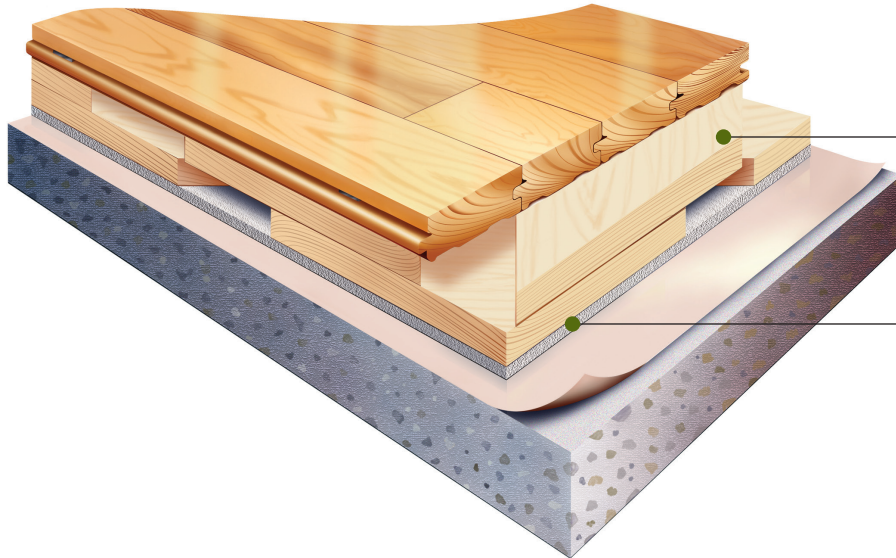

Two Layers 1" x 6"
(19 mm x 150 mm)
Subfloor Spacing
(6&2 or 2&2)

Continuous Blanket Pad
Available: 1/4" (6 mm),
7/16" (11 mm), 1/2" (12 mm),
3/4" (19 mm) Thicknesses

**MFMA NORTHERN HARD MAPLE
BY ACTION:**

Random Length (RL)
Action Long Length (FJ)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

EN 14904 Type 4
DIN 18032 Part 2
ASTM - F2772
MFMA PUR
FIBA Level I

SLAB DEPRESSION:

25/32" (20 mm): 2-1/2" (64 mm)
33/32" (26 mm): 2-3/4" (70 mm)

LEED:

FSC Maple & Subfloor available, MR credits — based on products, selected materials and facility locations


PERFORMANCE & SYSTEM STABILITY:

- Uniform playing surface
- Excellent ball bounce
- SCORES Compliant
- Double layer 1x6 subfloor system maximizes playing surface consistency

- ActionInterloc II has a proven continuous subfloor design that delivers excellent athletic performance with the structural integrity to handle heavy rolling loads.
- ActionInterloc II is available in various configurations, see individual specifications for ActionInterloc I, Interloc II, Interloc LP, and Interloc Plus for component and assembly data.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040-2006 and ISO 14044: 2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resource Institutes Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.

Complete product specifications and system drawings (CAD and BIM) are available online at:

www.actionfloors.com

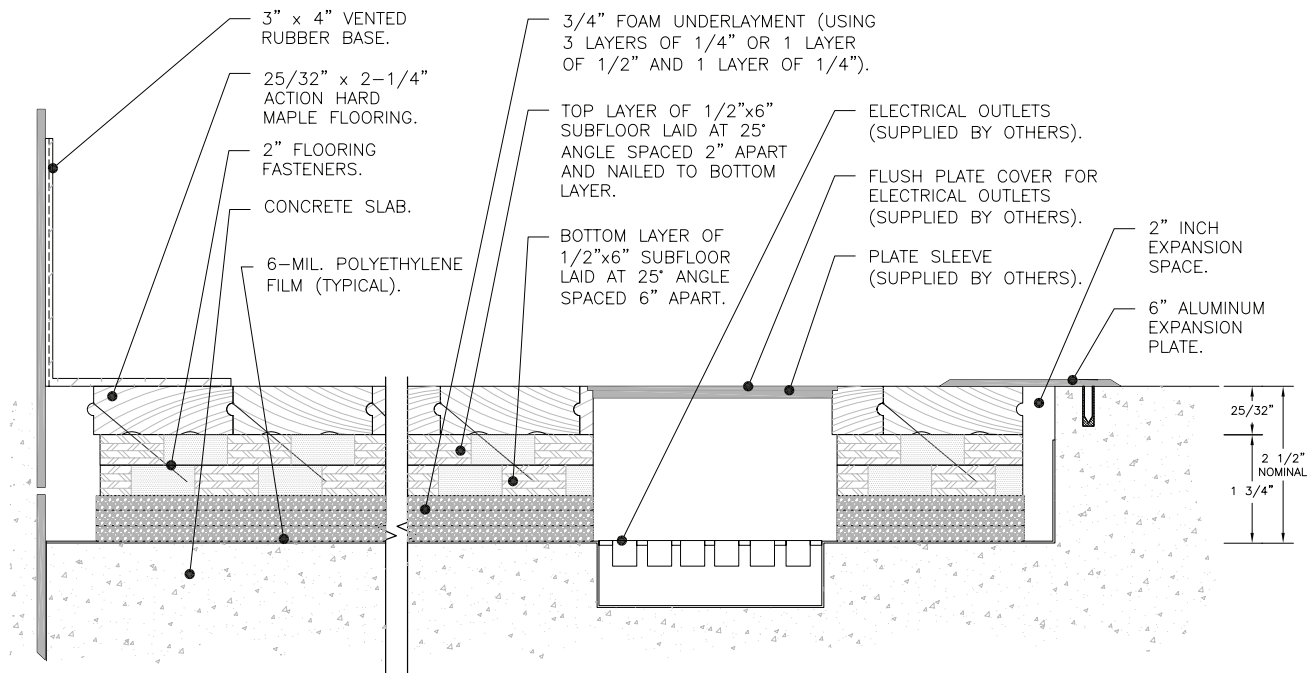

ActionInterloc II



ACTION FLOOR SYSTEMS LLC
4781 N. U.S. Hwy. 51 • Mercer, WI 54547-9708 U.S.A.

PHONE: 800.746.3512 or 715.476.3512 • FAX: 715.476.3585

E-MAIL: info@actionfloors.com

www.actionfloors.com

