




# Excel NR™ Floor System

SYSTEM TYPE: FLOATING RESILIENT

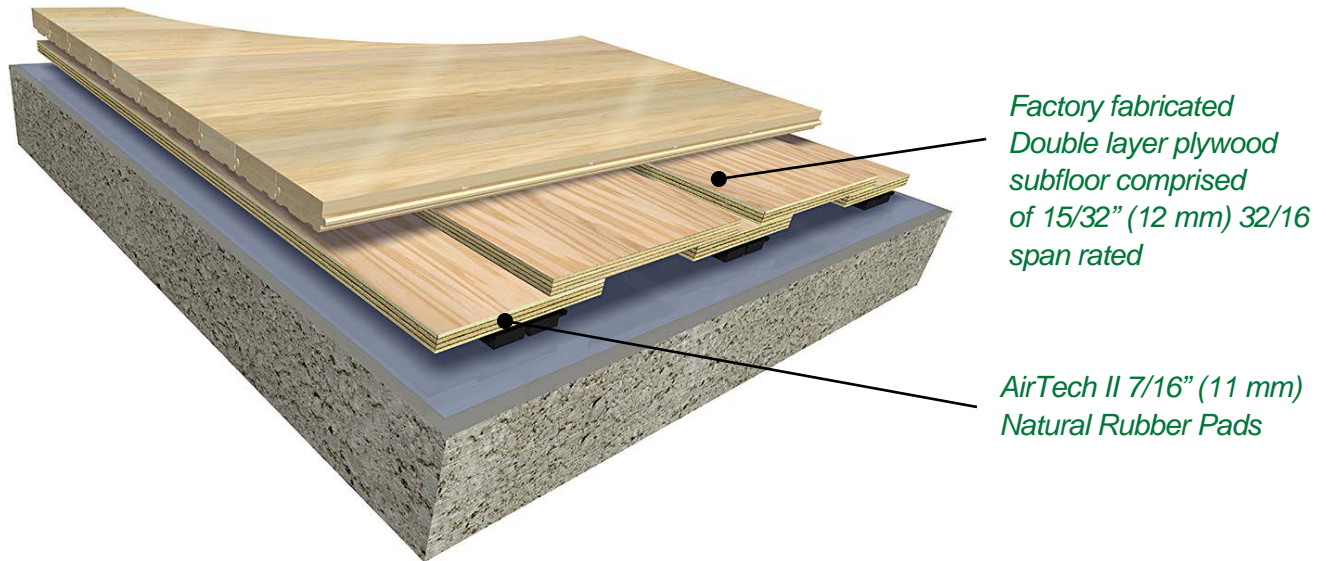

Factory fabricated  
Double layer plywood  
subfloor comprised  
of 15/32" (12 mm) 32/16  
span rated

AirTech II 7/16" (11 mm)  
Natural Rubber Pads

**MFMA NORTHERN HARD MAPLE  
BY ACTION:**

Random Length (RL).  
Action Long Length (FJ)  
Expansion Ridge Technology (ERT)

**TESTING AGENCY:**

Certified by ISSS

**PERFORMANCE MEETS OR EXCEEDS:**

MFMA PUR  
EN 14904 Type 4  
DIN 18032 Part 2  
ASTM – F2772  
FIBA Level 1

**SLAB DEPRESSION:**

25/32" (20 mm): 2-1/8" (54 mm)  
33/32" (27 mm): 2-3/8" (60 mm)

**LEED:**




FloorScore®-certified  
Proprietary certified EPD®  
FSC®-certified Maple and Subfloor available  
MR credits – based on products, selected materials and  
facility locations

**PERFORMANCE AND SYSTEM STABILITY:**

- Factory fabricated
- Excellent ball bounce
- SCORES Compliant
- Stable double layer plywood subfloor system
- Excellent shock absorption

- Innovative design that achieves outstanding playing performance characteristics in a floating floor system.
- Factory fabricated subfloor provides a level of consistency and uniformity on the installed system maximizing performance and satisfaction.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

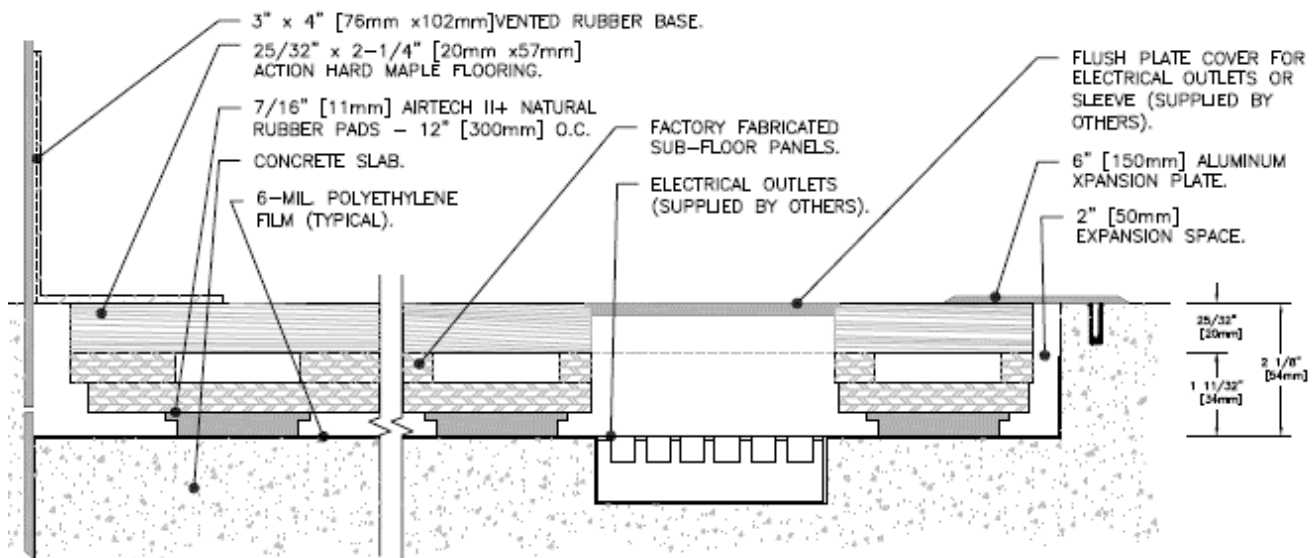

Complete product specifications and system drawings are available online at: [www.actionfloors.com](http://www.actionfloors.com)



ACTION FLOOR SYSTEMS, LLC  
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512  
FAX: 715-476-3585 • EMAIL: [info@actionfloors.com](mailto:info@actionfloors.com)

[actionfloors.com](http://actionfloors.com)

Rev 12/17