



ProAction Flex™ Floor System

SYSTEM TYPE: FLOATING RESILIENT



*Strong, stable, double layer
15/32" (12 mm) thick, APA
exposure 1 rated sheathing
minimum APA span rating of
32/16*

*7/16" (11 mm) Action
AirTech II Natural Rubber
pads with pneumatic
vertical air cells*

Option to specify Action Hardwood
Premium Sheathing (HPS)

MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL).
Action Long Length (FJ)
Expansion Ridge Technology (ERT)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

EN 14904

SLAB DEPRESSION 7/16" (11 mm) PAD:

25/32" (20 mm): 2-1/8" (54 mm)
33/32" (27 mm): 2-3/8" (60 mm)

LEED:



FloorScore®-certified
Proprietary certified EPD®
FSC®-certified Maple and Subfloor available
MR credits – based on products, selected materials and
facility locations

PERFORMANCE AND SYSTEM STABILITY:

- Stable double layer APA sheathing subfloor system
- AirTech 5/8" (16 mm) and 3/4" (19 mm) pad options available
- SCORES Compliant
- Performance can be matched to activity needs through pad option
- System features a low profile height
- Excellent playability, ball bounce and floor uniformity
- Consistent playing surface with very good shock absorption




3D BIM files online now
see us at
Sweets.com



ISO 14001:2004 VERIFIED

- Delivers uniform surface, the floor system can be tuned to meet your performance expectations.
- Features the proven stability and playability of double layer 15/32" (12 mm) sheathing subfloor design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

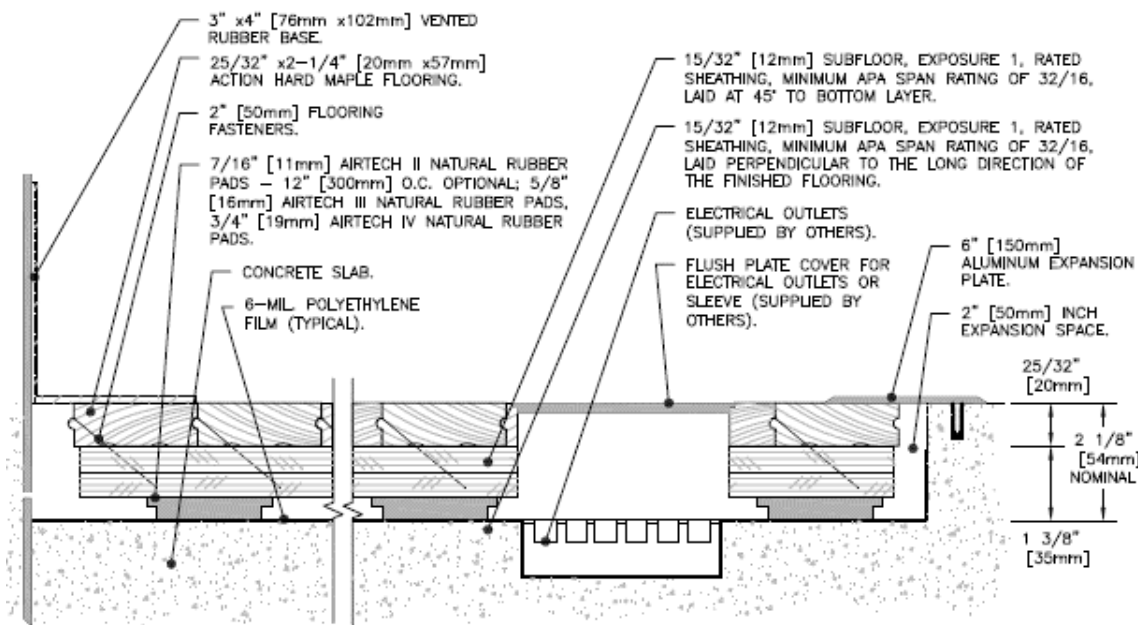

Complete product specifications and system drawings are available online at: www.actionfloors.com



ACTION FLOOR SYSTEMS, LLC
 4781 N. US Hwy 51 • Mercer, WI 54547
 TOLL FREE: 800-746-3512 • VOICE: 715-476-3512
 FAX: 715-476-3585 • EMAIL: info@actionfloors.com
actionfloors.com

Rev 11/20