

ProAction Thrust™ Floor System

SYSTEM TYPE: FLOATING RESILIENT



Double layer of 15/32" (12 mm) thick APA exposure 1 rated sheathing minimum APA span rating of 32/16)

ProAction 3/4" (19 mm) Natural Rubber Pads

MFMA NORTHERN HARD MAPLE BY ACTION:

Random Length (RL). Action Long Length (FJ)

Expansion Ridge Technology (ERT)

TESTING AGENCY: Certified by ISSS

MFMA PUR Compliant PERFORMANCE MEETS OR EXCEEDS:

DIN 18032 Part 2 FIBA Level 1 EN 14904

25/32" (20 mm): 2-1/2" (64 mm) SLAB DEPRESSION:

33/32" (27 mm): 2-3/4" (70 mm)

LEED:











FloorScore®-certified Proprietary certified EPD®

FSC®-certified Maple and Subfloor available MR credits - based on products, selected materials and facility locations

PERFORMANCE AND SYSTEM STABILITY:

- Variable load response ProAction pads
- Excellent ball bounce
- SCORES Compliant
- Stable double layer subfloor system
- Excellent shock absorption






















- ProAction Thrust is well suited to applications where high performance is important and FIBA certification is desired.
- Features the proven, durable double layer 15/32" (12 mm) subfloor design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

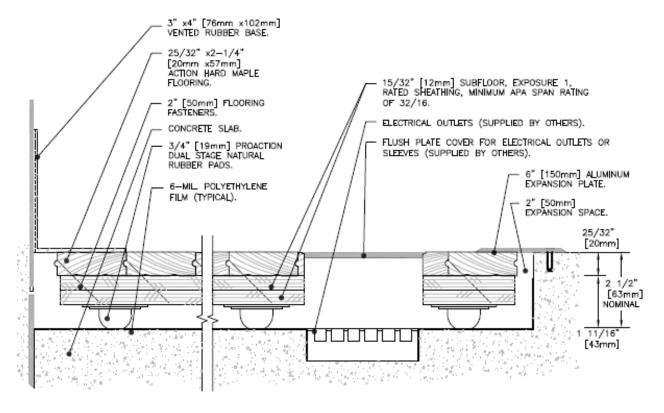

Complete product specifications and system drawings are available online at: www.actionfloors.com

