




ACTION HERCULAN SYSTEMS

SYSTEM TYPE: POURED URETHANE

Action Herculan MF

- 1 Exclusive Water-Based Urethane Top Coat — No Volatile Organic Compounds
- 2 Self-Leveling Polyurethane Coatings
- 3 Seal Coat
- 4 Recycled Granular Rubber Base Mat

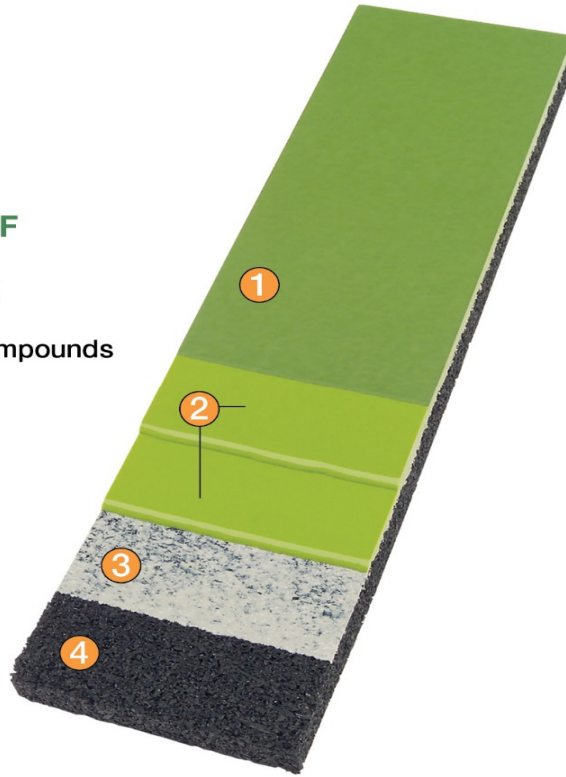

	MF	MF 800	SR	RH	TC	PE	ME	RT
Pad Options	4mm-14mm	4mm-14mm	10mm	4mm-9mm	7mm	14mm	3mm	N/A
Tensile Strength	1,203 psi 8.3 N/mm sq	11 N/mm sq	23 N/mm sq	21 N/mm sq	11 N/mm sq	11 N/mm sq	11 N/mm sq	12 N/mm sq
Tear Resistance	128 pi 23 N/mm	25 N/mm	50 N/mm	95 N/mm	25 N/mm	25 N/mm	25 N/mm	30 N/mm
Elongation Strength	150%	190%	340%	70%	190%	190%	190%	220%
Primary Usage	Indoor multi-function	Indoor multi-function	Indoor multi-purpose point elastic	Indoor multi-purpose mix elastic	Indoor / Outdoor multi-function	Indoor multi-purpose point elastic	Indoor multi-purpose mix elastic	Indoor multi-purpose point elastic

* Sustainable Construction Of Renewable Engineered Surfaces. Action has been certified as a Carbon Negative provider following a Life Cycle Assessment conducted by the University of Wisconsin and Carbon Clear, an international independent auditor of manufacturing carbon profiles.



ISO 14001:2015 VERIFIED