




Action Wood Flex

SYSTEM TYPE: FLOATING RESILIENT

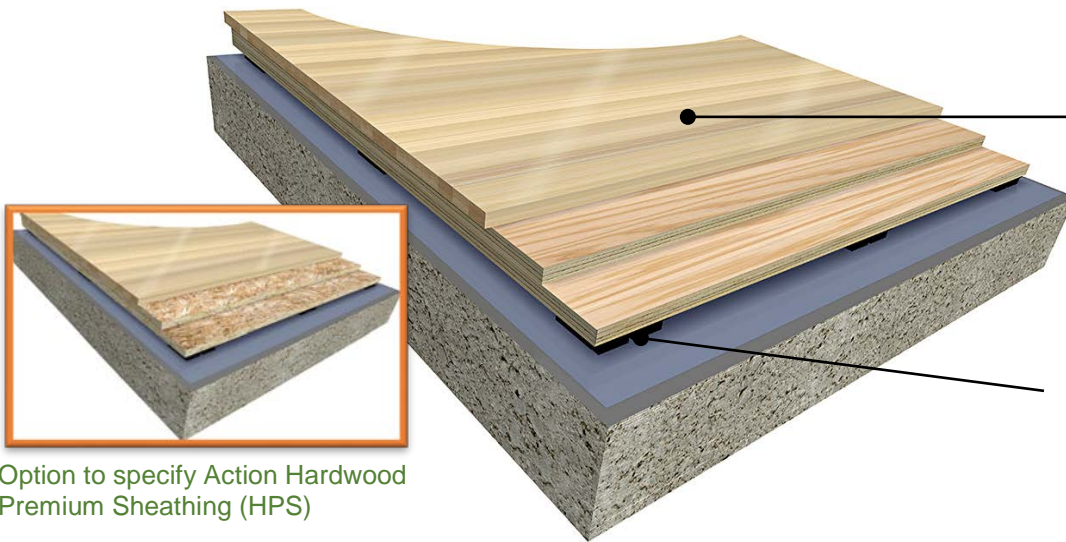

Maple Parquet is adhered directly to multiple layers of 15/23" (12 mm) sheathing subfloor APA rated exposure 1

7/16" (11 mm) Natural Rubber AirTech II Pads
Optional: 3/4" (19mm) Proflex Pads, or 1/2" Closed Cell or Open Cell Foam

Option to specify Action Hardwood Premium Sheathing (HPS)

Northern Hard Maple by Action:

Parquet is available in 5/16" or 7/16" thickness 7/8" x 9" pickets assembled into 9"x18" panels Second and better, third or third and better grades available

Testing Agency:

Certified by ISSS

Performance Meets or Exceeds:

Meets DIN 18032 Part II when utilizing optional 3/4" all natural rubber Proflex Pads (19mm)

Slab Depression:

1-3/4" (45 mm)

LEED:




FloorScore[®]-certified
Proprietary certified EPD[®]
FSC[®]-certified Maple and Subfloor available
MR credits – based on products, selected materials and facility locations

Performance and System Stability:

- Factory fabricated maple panel system
- Stable double layer sheathing subfloor system
- Natural rubber pads recover quickly after impact



- Action Wood Floor system provides great ball response and uniform playability. Low profile allows for a wide variety of new and retrofit applications.
- Factory fabricated panel system allows for installation on existing concrete, plywood or resilient subfloor surface.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

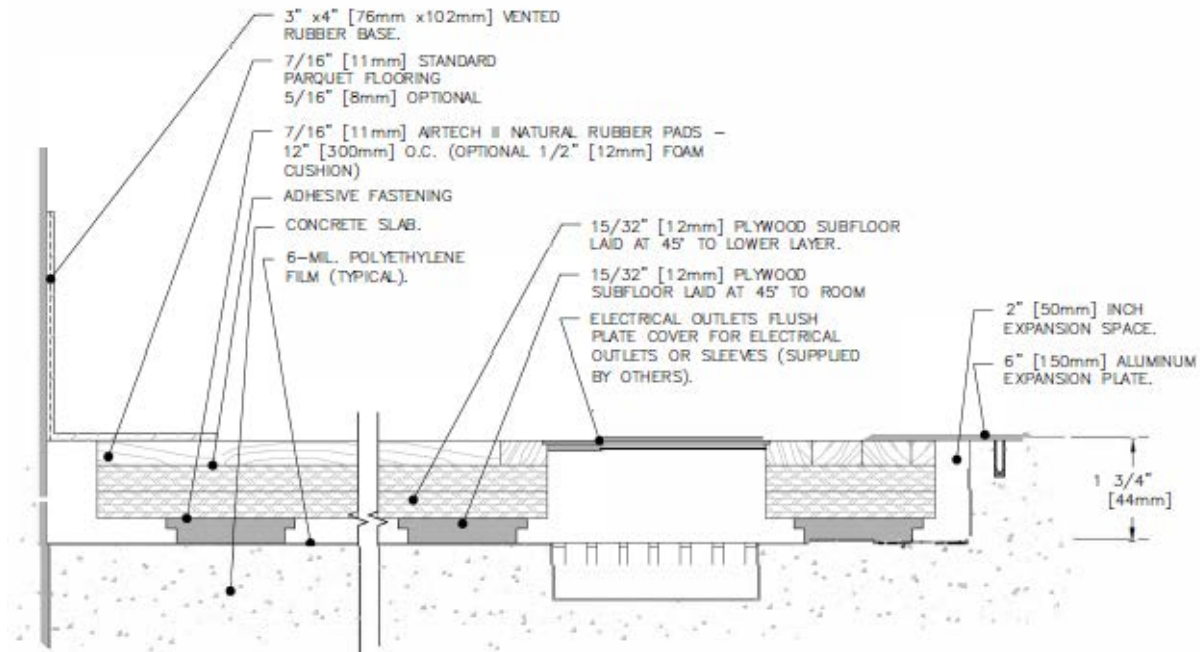

Complete product specifications and system drawings are available online at: www.actionfloors.com



ACTION FLOOR SYSTEMS, LLC
 4781 N. US Hwy 51 • Mercer, WI 54547
 TOLL FREE: 800-746-3512 • VOICE: 715-476-3512
 FAX: 715-476-3585 • EMAIL: info@actionfloors.com
actionfloors.com