


## ActionWood Ultimate

## **SYSTEM TYPE: FLOATING RESILIENT**

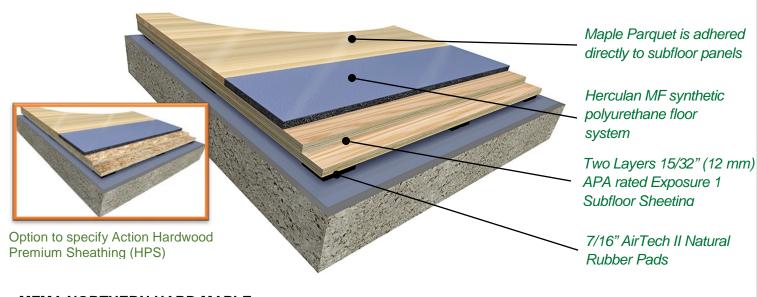

MFMA NORTHERN HARD MAPLE BY ACTION:

Parguet for this application is available in 5/16" and 7/16" thickness. 7/8" x 9" pickets are assembled into 9"x18" panels. Second and better, third, or third and better grades available.

**TESTING AGENCY:** Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

5/16" (7 mm): 1-13/16" (46 mm) **SLAB DEPRESSION:** 

LEED:







PERFORMANCE AND SYSTEM STABILITY:





FSC®-certified Maple and Subfloor available MR credits – based on products, selected materials and facility locations

- Stable double layer sheathing system
- Superior stability and strength
- Excellent shock absorption
- Great ball response

FloorScore®-certified

Proprietary certified EPD®
























- ActionWood Ultimate floor system is an excellent combination product for field houses, gymnasiums and large multipurpose areas.
- Features the proven, stable, durable double layer sheathing design.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

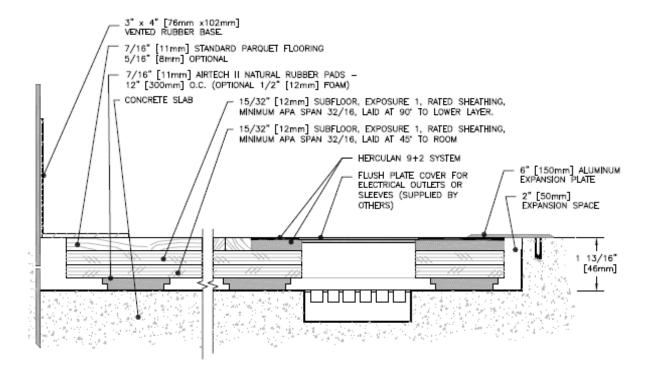

Complete product specifications and system drawings are available online at: www.actionfloors.com

