



# Anchor Tech LP

SYSTEM TYPE: ANCHORED RESILIENT



*Factory Fabricated Subfloor System with steel retention cup allowing for subfloor movement*

*3/16" (5mm) AirTech I pads offer a low profile system with our Natural Rubber pads.*

**MFMA NORTHERN HARD MAPLE BY ACTION:**

Random Length (RL)  
Action Long Length (FJ)  
Expansion Ridge Technology (ERT)

**TESTING AGENCY:**

Certified by ISSS

**PERFORMANCE MEETS OR EXCEEDS:**

**SLAB DEPRESSION:**

25/32" (20 mm): 1-3/4" (45 mm)  
33/32" (27 mm): 2" (50 mm)

**LEED:**




FloorScore<sup>®</sup> -certified  
Proprietary certified EPD<sup>®</sup>  
FSC<sup>®</sup> -certified Maple and Subfloor available  
MR credits – based on products, selected materials and facility locations

**PERFORMANCE AND SYSTEM STABILITY:**

- Factory fabricated subfloor system
- Superior stability and strength
- System design is perfect for low profile installations
- Anchored system confirms uniform performance



- Action Anchor Tech LP Floor system provides for great ball response and uniform playability to maximize the athletes comfort and performance.
- Factory fabricated subfloor system and resilient layer provides for low profile and great playability.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040-2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

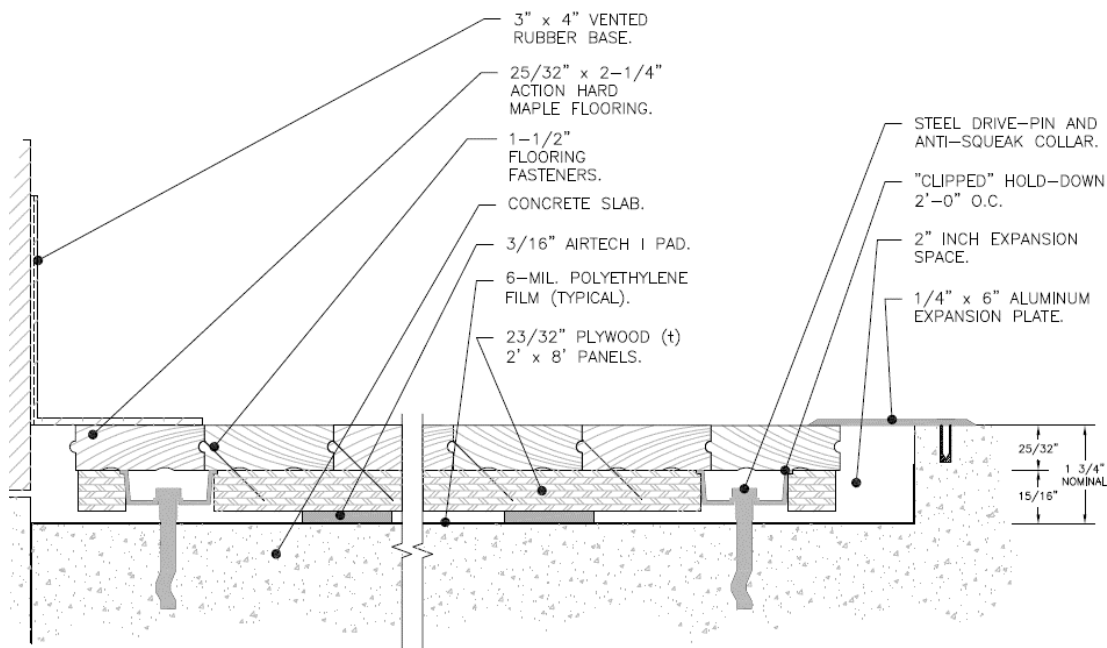

Complete product specifications and system drawings are available online at: [www.actionfloors.com](http://www.actionfloors.com)



ACTION FLOOR SYSTEMS, LLC  
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512  
FAX: 715-476-3585 • EMAIL: [info@actionfloors.com](mailto:info@actionfloors.com)

[actionfloors.com](http://actionfloors.com)

Rev 12/17