




Action Interloc I™ Floor System

SYSTEM TYPE: FLOATING RESILIENT

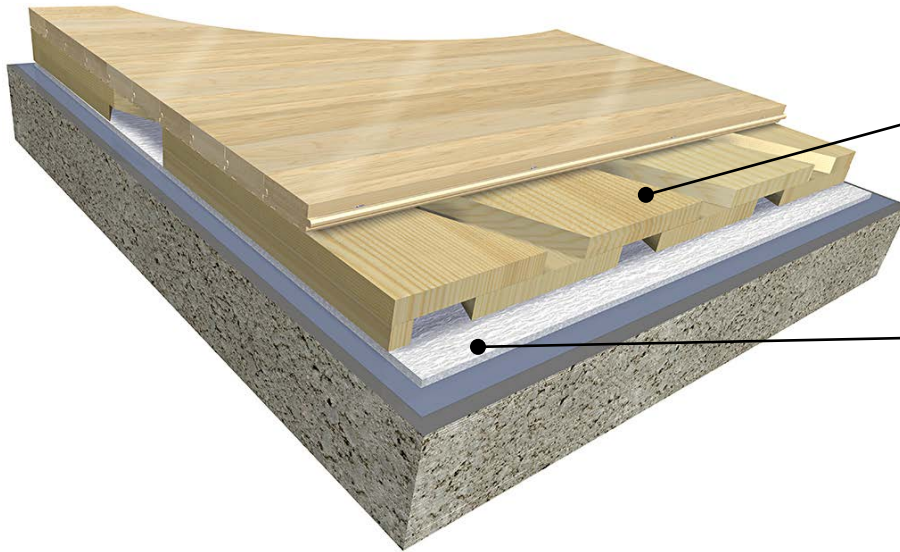

Two Layers 1" x 6" (19 mm x 150 mm) Subfloor.
Spacing (6&2) or (2&2)

Continuous Blanket Pad
Available: 1/4" (6 mm), or
1/2" (12 mm)

**MFMA NORTHERN HARD MAPLE
BY ACTION:**

Random Length (RL)
Action Long Length (FJ)
Expansion Ridge Technology (ERT)

TESTING AGENCY:

Certified by ISSS

PERFORMANCE MEETS OR EXCEEDS:

ASTM - F2772

SLAB DEPRESSION 1/4" (6 mm) PAD:

25/32" (20 mm): 2-1/2" (64 mm)
33/32" (27 mm): 2-3/4" (70 mm)

LEED:




FloorScore®-certified
Proprietary certified EPD®
FSC®-certified Maple and Subfloor available
MR credits – based on products, selected materials
and facility locations

PERFORMANCE & SYSTEM STABILITY:

- Uniform playing surface
- Excellent ball bounce
- SCORES Compliant
- Double layer 1x6 subfloor system maximizes playing surface consistency

- Action Interloc has a proven continuous subfloor design that delivers excellent athletic performance with the structural integrity to handle heavy rolling loads.
- Action InterLoc is available in various configurations, see individual specifications for Action InterLoc 1, Inteloc II, InterLoc LP and InterLoc Plus for component and assembly data.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

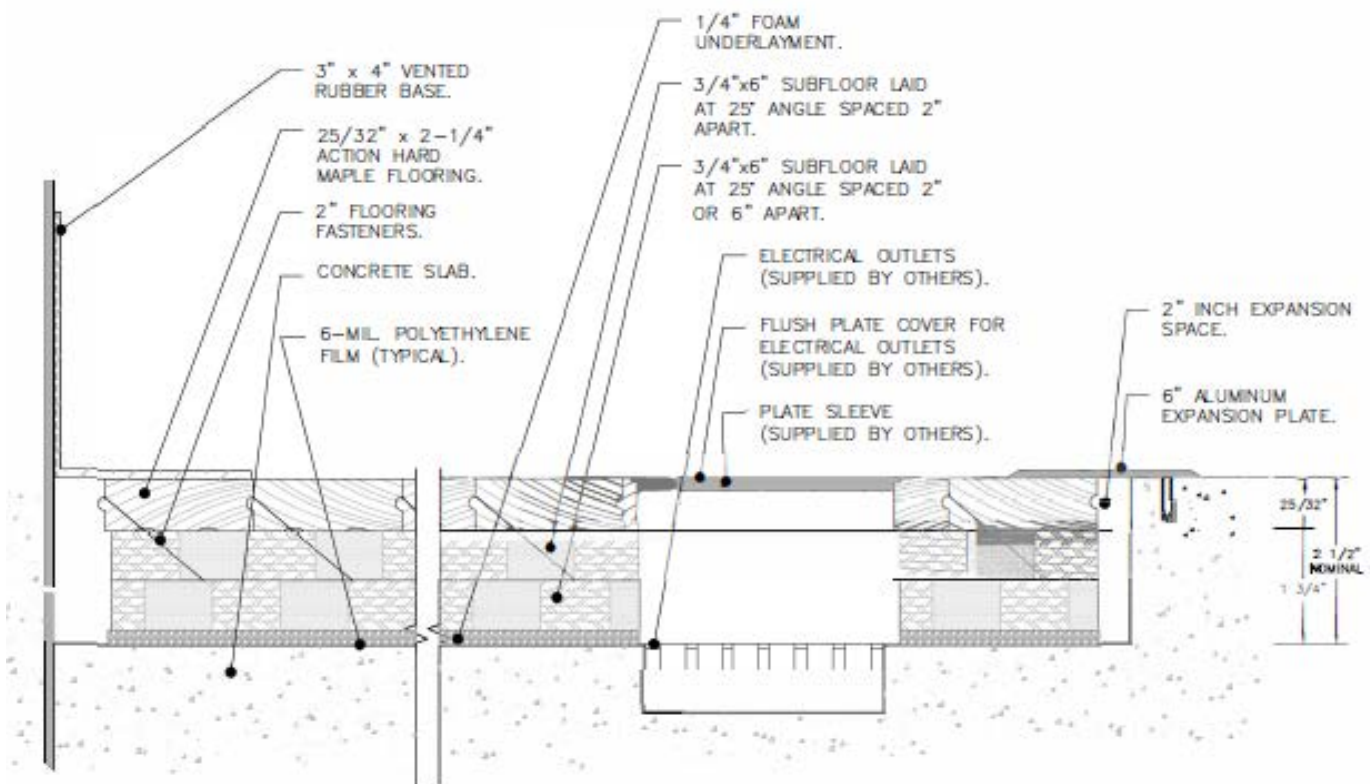

Complete product specifications and system drawings are available online at: www.actionfloors.com



ACTION FLOOR SYSTEMS, LLC
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512
FAX: 715-476-3585 • EMAIL: info@actionfloors.com

actionfloors.com

Rev 11/2017