




# PowerChannel

SYSTEM TYPE: ANCHORED RESILIENT

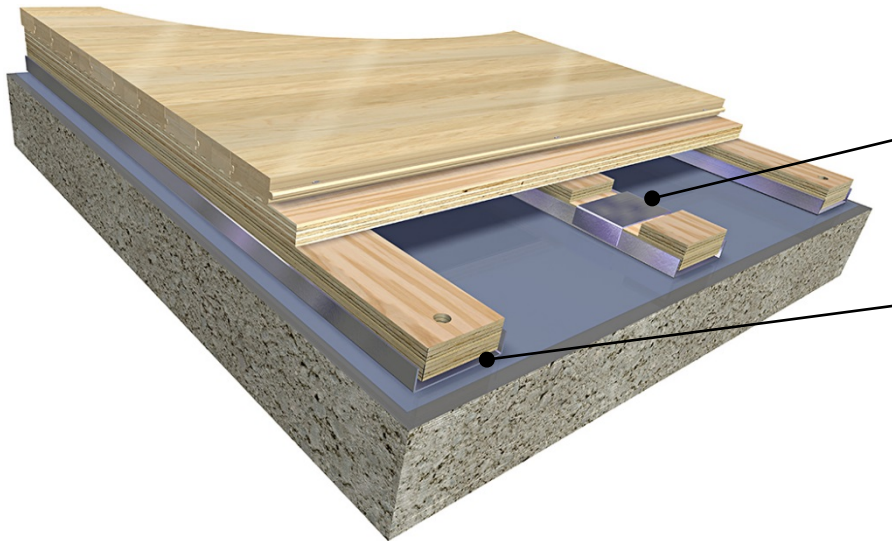

Factory fabricated steel channels and laminated sleepers with resilient pads for exceptional performance and stability.

AirTech II 7/16" (11 mm) natural rubber performance pads.

**MFMA Northern Hard Maple by Action:**

Random Length (RL)  
Action Long Length (FJ)  
Action Expansion Ridge Technology (ER)

**Testing Agency:**

Certified by ISSS

**Performance Meets or Exceeds:**

EN 14904 Type 4

**Slab Depression:**

25/32" (20 mm): 2-7/8" (73 mm)  
33/32" (27 mm): 3-1/8" (79 mm)

**LEED:**



FloorScore®-certified  
Proprietary certified EPD®  
FSC®-certified Maple and Subfloor available  
MR credits – based on products, selected materials and facility locations

**Performance and System Stability:**



Anchored resilient design for stability

- Excellent athletic playability
- Excellent shock absorption
- Factory fabricated subfloor for superior consistency
- SCORES\* compliant

\* Sustainable Construction Of Renewable Engineered Surfaces. Action has been certified as a Carbon Negative provider following a Life Cycle Assessment conducted by the University of Wisconsin and Carbon Clear, an international independent auditor of manufacturing carbon profiles.



- Factory fabricated subfloor channels combined with APA rated subfloor deck provides a superior level of uniformity.
- Engineered to deliver outstanding playability and performance while minimizing unwanted vibration/energy transfer to the athlete.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040-2006 and ISO 14044: #2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resource Institutes Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

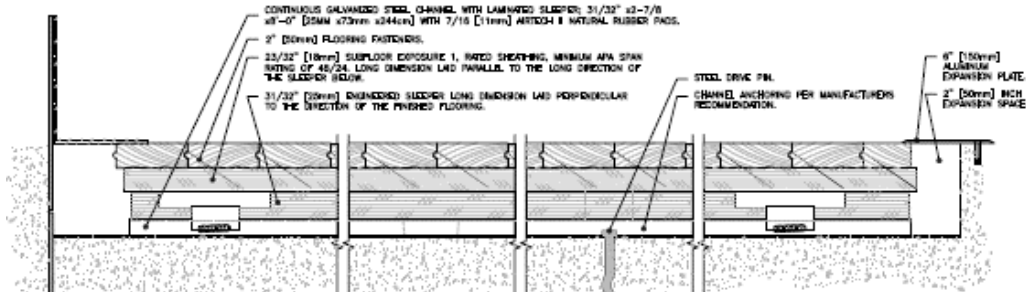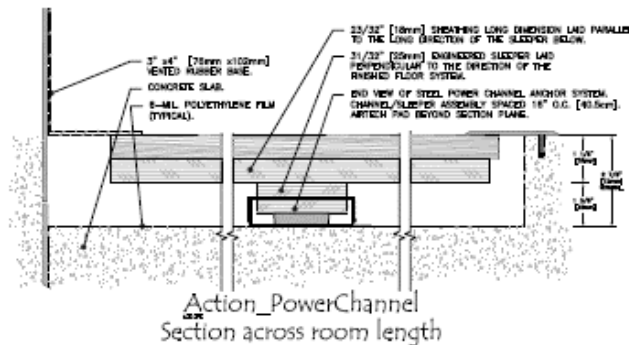

Complete product specifications and system drawings are available online at: [www.actionfloors.com](http://www.actionfloors.com)



ACTION FLOOR SYSTEMS, LLC  
 4781 N. US Hwy 51 • Mercer, WI 54547  
 TOLL FREE: 800-746-3512 • VOICE: 715-476-3512  
 FAX: 715-476-3585 • EMAIL: [info@actionfloors.com](mailto:info@actionfloors.com)  
[actionfloors.com](http://actionfloors.com)