




ACTION IG 400

SYSTEM TYPE: Commercial – Institutional - Industrial Floor System

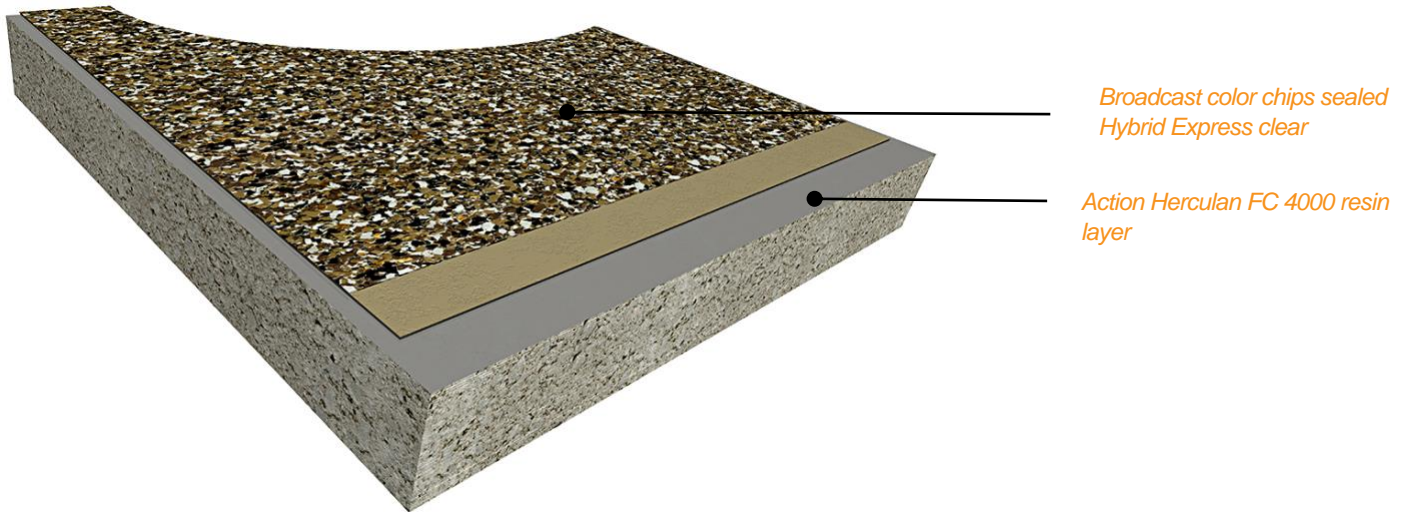

Broadcast color chips sealed
Hybrid Express clear

Action Herculan FC 4000 resin
layer

Action IG 400 System:

2.25mm total thickness

Performance Meets or Exceeds:

Density Resin + Hardener	~1180 kg/m3
Wear resistance (Taber)	34 mg
Shore Hardness (DIN 53505)	~D 70
VOC Content	< 10 grams/liter

Multi-use indoor:

Commercial – Industrial – Retail Flooring

Applications:

Entrance & Reception Halls, Kitchens & Sanitary Rooms
Laboratory and Industrial Classrooms

LEED:



- Supplied by a zero waste company
- Meets all criteria and certified under Eco Specifier Product Assessment Certificate
- Supplied by ISO 14000:2006-certified company

Performance and System Quality:

- Hygienic and simple to clean
- Industry's strongest structural layer
- Can be resurfaced when required
- Solvent-free from top to bottom

* Sustainable Construction Of Renewable Engineered Surfaces. Action has been certified as a Carbon Negative provider following a Life Cycle Assessment conducted by the University of Wisconsin and Carbon Clear, an international independent auditor of manufacturing carbon profiles.

- Environmentally-smart system engineered to focus materials where needed for durability and performance.
- Manufacturer and flooring system independently verified by guidelines of the ISO 9000 and 14001.
- Accredited “Ecospecifier” product for achievement of Green Building Rating Tool Credits.
- Flooring system shall be supplied by a Carbon Negative company on the basis of an earned carbon negative status.



ACTION FLOOR SYSTEMS, LLC
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512
FAX: 715-476-3585 • EMAIL: info@actionfloors.com

actionfloors.com