




# ACTION SL Duo

SYSTEM TYPE: Decorative Commercial & Institutional Floor System

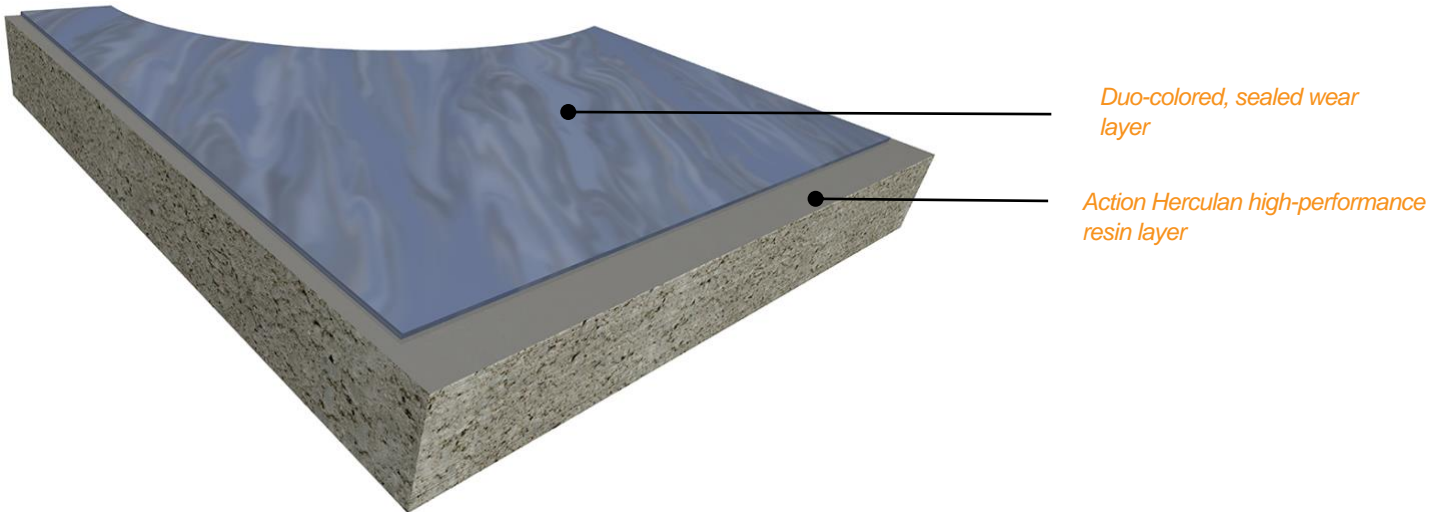

**Action SL Duo Floor System:** 2.25mm total thickness

**Performance Characteristics:**

Density Resin + Hardener	~1500 kg/m3
Surface Hardness (DIN 53505)	D 65
Elongation at Break (DIN 54555)	95%
Tensile Strength (DIN 53455)	14 MP a

**Multi-use indoor:** Commercial – Institutional – Retail – Residential

**Applications:** Schools, Libraries, Hotels, Offices, Retail Shops, Rehabilitation & Care Facilities, Residential

**LEED:**



- Supplied by a zero-waste company
- Meets all criteria and certified under Eco Specifier Product Assessment Certificate
- Supplied by ISO 14000:2006 certified company

**System Qualities:**

- Hygienic and simple to clean
- Seamless
- Solvent-free, self-leveling floor system
- Environmentally responsible
- Industry's strongest structural layer

\* Sustainable Construction Of Renewable Engineered Surfaces. Action has been certified as a Carbon Negative provider following a Life Cycle Assessment conducted by the University of Wisconsin and Carbon Clear, an international independent auditor of manufacturing carbon profiles.



- Environmentally-smart system engineered to focus materials where needed for durability and performance.
- Manufacturer and flooring system independently verified by guidelines of the ISO 9000 and 14001.
- Accredited “Ecospecifier” product for achievement of Green Building Rating Tool Credits.
- Flooring system shall be supplied by a Carbon Negative company on the basis of an earned carbon negative status.



ACTION FLOOR SYSTEMS, LLC  
4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512  
FAX: 715-476-3585 • EMAIL: [info@actionfloors.com](mailto:info@actionfloors.com)

[actionfloors.com](http://actionfloors.com)