

# ActionTech™ Floor System

## **SYSTEM TYPE: FLOATING RESILIENT**



Factory fabricated subfloor system with low 1-5/8" profile height making it the ideal replacement floor system for antiquated clip and channel floor system installations.

Floating floor design installs quickly. Panels are installed at 45-degrees to the rooms long dimension.

Factory attached 3/8" (10 mm) E-Cush pads provide substantial athletic performance vs. the old, unforgiving, clip and channel floor systems.

MFMA NORTHERN HARD MAPLE **BY ACTION:** 

Random Length (RL) Action Long Length (FJ) Expansion Ridge Technology (ERT)

**TESTING AGENCY:** 

Certified by ISSS

#### **PERFORMANCE MEETS OR EXCEEDS:**

**SLAB DEPRESSION:** 

1-5/8" (41mm) using 25/32" (20mm) flooring

#### LEED:











FloorScore®-certified Proprietary certified EPD®

FSC®-certified Maple and Subfloor available MR credits – based on products, selected materials and facility locations

### PERFORMANCE & SYSTEM STABILITY:

- Low profile perfect for clip & channel retro fit applications
- Superior stability and strength
- Factory fabricated subfloor system
- System design provides solid blocking characteristic
- SCORES Compliant
- Uniform and consistent playing surface






























- Delivers uniform surface, the floor system can be tuned to meet your performance expectations.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14040:2006 and ISO 14044:2006 Life Cycle Assessment (LSA) confirming a negative carbon footprint.
- Carbon Evaluation must be inclusive and based on all corporate facilities, offices and mills.
- The manufacturer and flooring shall be independently verified by the guidelines of the ISO 14064-1:2006 World Resources Institute Greenhouse Gas Protocol, Scope 1, 2 and 3.
- The manufacturer and flooring shall be registered in the Collaborative for High Performance Schools (CHPS) Product Database.
- Floor system manufacturer must provide a Life Cycle Assessment and an Environmental Product Declaration (EPD®) in accordance with the Product Category Rule Version 2.2014.
- Floor system manufacturer must be FloorScore® Certified in accordance with CDPH 01350.

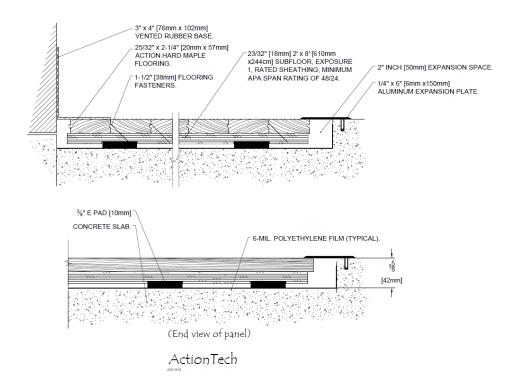

Complete product specifications and system drawings are available online at: www.actionfloors.com



ACTION FLOOR SYSTEMS, LLC 4781 N. US Hwy 51 • Mercer, WI 54547

TOLL FREE: 800-746-3512 • VOICE: 715-476-3512 FAX: 715-476-3585 • EMAIL: info@actionfloors.com